

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number
WO 2005/040016 A1

(51) International Patent Classification⁷: **B65G 17/06**,
17/02

(21) International Application Number:
PCT/NL2003/000721

(22) International Filing Date: 23 October 2003 (23.10.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **HALBESMA, Joan, Anton** [NL/NL]; Waard-
huizen 40, NL-4287 LS Waardhuizen (NL).

(74) Agent: **PRINS, A., W.**; Vereenigde, Johan de Wittlaan 7,
NL-2517 JR Den Haag (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, EG, ES, FI (utility model), FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: FLEXIBLE CONVEYOR FOR CONVEYING EXCEPTIONALLY HEAVY LOADS

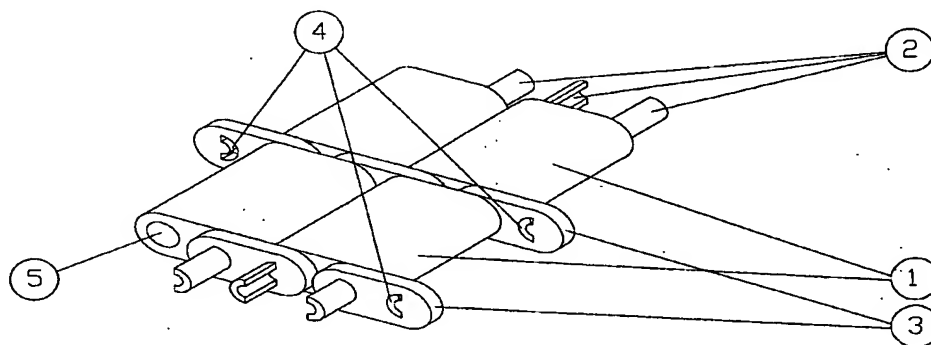

(57) Abstract: The invention relates to a conveyor for moving very heavy loads, consisting of a chain having widthwise multiple links and wherein, in longitudinal direction, the links are alternately of plastic and steel while the chain is provided at its bottom side with a continuous, one-piece rubber band. In order to have the conveyor move very heavy loads, it is provided that the plastic links in the chain have a combined bearing and pulling function and in them form a sleeve bearing with their underground.

WO 2005/040016 A1